




TECHNICAL DATA

		C 300 H M570	C 300 H x4 M571
GENERAL			
Load capacity to 500 mm	Kg	3000	3000
Load capacity to 600 mm	Kg	2770	2770
Unladen weight *	Kg	5625	5625
Transmission			
		2-speed hydrostatic	2-speed hydrostatic
MAST			
Fork carriage		FEM 3	FEM 3
Carriage width	mm	1260/1660	1260/1660
ENGINE			
Make		KUBOTA	KUBOTA
Model		V2403	V2403
Power	kW	36,5	36,5
Operating speed	rpm	2600	2600
Torque	Nm@rpm	158,6@1600	158,6@1600
No. cylinders		4	4
Emissions		Tier4i, Stage IIIA	Tier4i, Stage IIIA
Ambient noise	dB(A)	104	104
Consumption	l/h	5,9	5,9
CO ₂	Kg/h	15,3	15,3
DRIVING			
Max. speed	Km/h	22	22
Gradability	%	30	30
Traction		4x2	4x4 FullGrip®
Front tyres		12.5/80-18	12.5/80-18
Rear tyres		27x10-12	10.0/75-15.3
HYDRAULIC SYSTEM			
Hydraulic circuit	l/min	70,2	70,2
Working pressure	bar	170	170
TANK CAPACITY			
Fuel	l	80	80
Hydraulic	l	85	85
BRAKES			
Service		Hydraulic, multi-disc and sealed	Hydraulic, multi-disc and sealed
Parking		Mechanical, multi-disc and sealed	Mechanical, multi-disc and sealed

* It may change due to optional equipment

DIMENSIONS

TYPE OF MAST	Maximum lift (mm)	H		Free lift (mm)	Load at maximum height (kg)	
		Retracted mast height (mm)	Extended mast height (mm)		Narrow axle	All-terrain use Wide axle
Duplex mast (Std.)	3300	2600	4500	120	3000	3000
Triplex mast	3700	2090	4900	1200	2400	3000
Triplex mast	5400	2660	6600	1680	-	1500

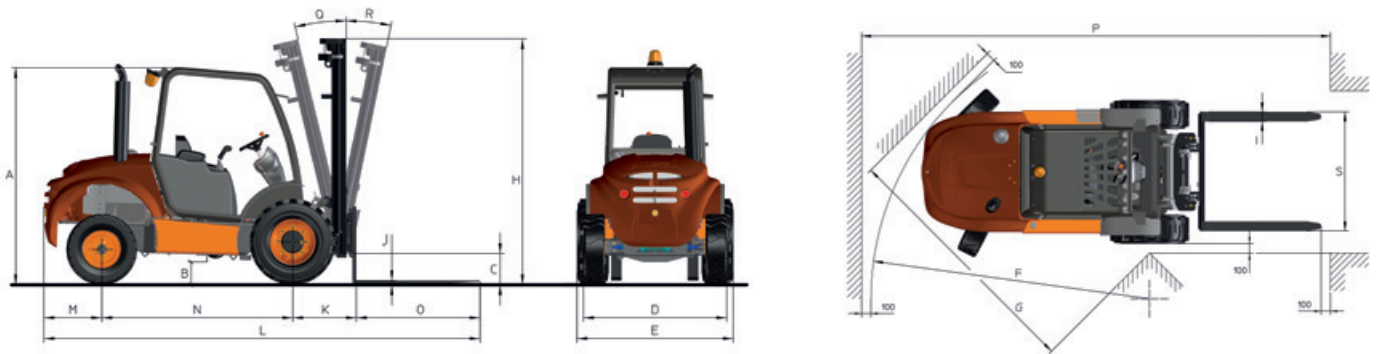

DIMENSIONS (mm)	C 300 H	C 300 H x4
A	2160	2220
B	270	285
C	305	295
D	1448	1547
E	1520	1520
E**	1780	1780
F	3500	4300
G	2855	2855
I	120	120
J	50	50
K	710	700
L	4552	4535
M	622	615
N	2020	2020
O	1200	1200
P	5610	6400
Q	14	14
R	11	11
S	1260	1260
S***	1660	1660

** Measured with high-lift mast installed ***Measured for wide axle carriage



www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.