




TECHNICAL DATA

GENERAL		C 350 H M572	C 350 H x4 M573
Load capacity to 500 mm	Kg	3500	3500
Load capacity to 600 mm	Kg	3230	3230
Unladen weight *	Kg	5925	5925
Transmission			
MAST		2-speed hydrostatic	2-speed hydrostatic
Fork carriage		FEM 3	FEM 3
Carriage width	mm	1260/1660	1260/1660
ENGINE			
Make		KUBOTA	KUBOTA
Model		V2403	V2403
Power	kW	36,5	36,5
Operating speed	rpm	2600	2600
Torque	Nm@rpm	158,6@1600	158,6@1600
No. cylinders		4	4
Emissions		Tier4i, Stage IIIA	Tier4i, Stage IIIA
Ambient noise	dB(A)	104	104
Consumption	l/h	5,9	5,9
CO ₂	Kg/h	15,3	15,3
DRIVING			
Max. speed	Km/h	22	22
Gradability	%	30	30
Traction		4x2	4x4 FullGrip®
Front tyres		16/70-20	16/70-20
Rear tyres		27x10-12	10.0/75-15.3
HYDRAULIC SYSTEM			
Hydraulic circuit	l/min	70,2	70,2
Working pressure	bar	190	190
TANK CAPACITY			
Fuel	l	80	80
Hydraulic	l	85	85
BRAKES			
Service		Hydraulic, multi-disc and sealed	Hydraulic, multi-disc and sealed
Parking		Mechanical, multi-disc and sealed	Mechanical, multi-disc and sealed

* It may change due to optional equipment

DIMENSIONS

TYPE OF MAST	Maximum lift (mm)	H		Free lift (mm)	Load at maximum height (kg)	
		Retracted mast height (mm)	Extended mast height (mm)		Narrow axle	All-terrain use Wide axle
Duplex mast (Std.)	3300	2670	4570	120	3500	3500
Triplex mast	3700	2130	4970	1200	3200	3500
Triplex mast	5400	2700	6670	1680	-	1600

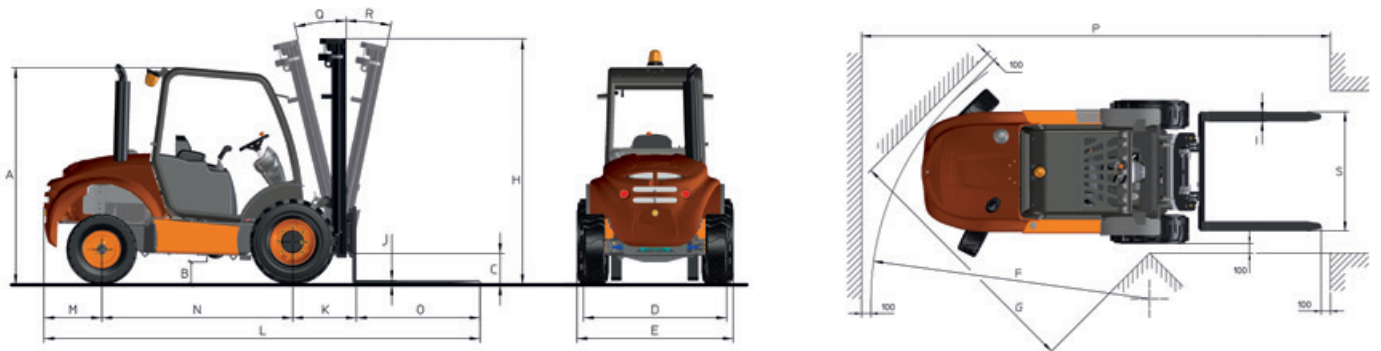

DIMENSIONS (mm)	C 350 H	C 350 H x4
A	2220	2250
B	300	320
C	375	360
D	1448	1547
E	1790	1790
E**	2050	2050
F	3500	4350
G	2945	2985
I	120	120
J	50	50
K	725	710
L	4585	4560
M	640	630
N	2020	2020
O	1200	1200
P	5625	6460
Q	14	14
R	11	11
S	1260	1260
S***	1660	1660

** Measured with high-lift mast installed ***Measured for wide axle carriage



www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.